

**Product designation**

InspecS® 380/75/000-00

Structure of the product designation:

Product name® Outer diameter/Overall height/Penetration dimension-colour

**InspecS®****Area of application**

Inspection cover for installation in synthetic impact-attenuating surfaces on playgrounds, sports and leisure facilities in accordance with DIN EN 1176-1:2017 and 1177.

**Product description**

Inspection cover integrated within the impact-attenuating surface as per DIN EN 1177 above foundations that are to be regularly inspected (as per DIN EN 1176-1:2017). The cover can be temporarily opened by authorised experts according to the regulations to allow for an unrestricted inspection of the underlying foundations. The inspection cover is always positioned around vertical or inclined poles and is returned to its original position by the inspector following inspection (see instruction manual).

For new constructions, the inspection cover is positioned on the upper edge of the impact-attenuating surface to be installed around playground equipment poles and embedded seamlessly to form an interlocking, detachable connection (see installation instructions).


Existing areas can be retrofitted using the InspecS® tool kit, which is also available. The inspection cover universally fulfils the impact-attenuating properties of the surrounding impact-attenuating surface as per DIN EN 1177, both in new constructions and when retrofitted.

**General technical specifications**

Dimensions	d = 380 x h = 75 mm / customized opening
Weight	approx. 1.200 g
Material	EPDM, PUR, PE, WNr. 1.4301
Surface	open-pored, water-permeable
Colour	24 different colours

**Applied regulations, standards, reviews**

DIN EN 1176-1:2017  
DIN EN 1177:2018-03  
HIC-testing

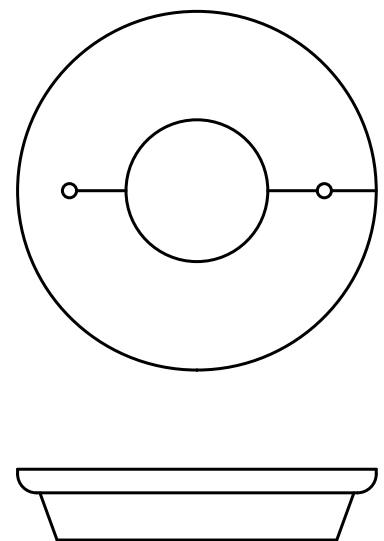

We reserve the right to make technical changes to improve our products and adapt them to standards and legal requirements. [For more information, see www.inspecs.de](http://www.inspecs.de)